


3.5" -eIO Series

The comprehensive 3.5" single board computer portfolio is rounded out by a series of I/O and function expansion boards, named 3.5"-eIO.

The 3.5"-eIO expansion boards are designed for Kontron's new generation of 3.5" single board computers with a board-to-board connector soldered on them and can be used to stack additional rear I/O connectors, internal connectors, and expansion slots on the single board computer.

This off-the-shelf expansion board can help system designers reduce time-to-market and development costs. It also minimizes technical risks and creates a more reliable system.

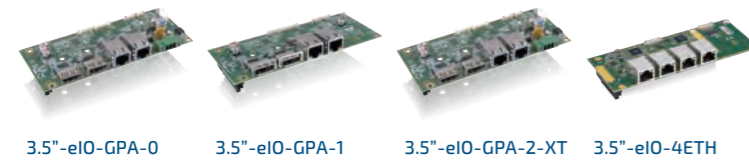

I/O Panel	DP	2	2	2	0
	2.5 GbE	2	2	2	4
DC In	1	0	1	0	
Operating Temp.	Max.	60 °C / 140 °F	60 °C / 140 °F	85 °C / 185 °F	85 °C / 185 °F
	Min.	0 °C / 32 °F	0 °C / 32 °F	-40 °C / -40 °F	-40 °C / -40 °F



About Kontron


Kontron is a global leader in IoT/Embedded Computing Technology (ECT) and offers individual solutions in the areas of Internet of Things (IoT) and Industry 4.0 through a combined portfolio of hardware, software and services. With its standard and customized products based on highly reliable state-of-the-art technologies, Kontron provides secure and innovative applications for a wide variety of industries. As a result, customers benefit from accelerated time-to-market, lower total cost of ownership, extended product lifecycles and the best fully integrated applications.

For more information, please visit: www.kontron.com

About the Intel® Partner Alliance

From modular components to market-ready systems, Intel and the over 1,000+ global member companies of the Intel® Partner Alliance provide scalable, interoperable solutions that accelerate deployment of intelligent devices and end-to-end analytics. Close collaboration with Intel and each other enables Alliance members to innovate with the latest IoT technologies, helping developers deliver first-in-market solutions.

Intel and Atom are registered trademarks of Intel Corporation in the U.S. and other countries.



Global Headquarters

Kontron Europe GmbH


Gutenbergstraße 2
85737 Ismaning, Germany
Tel.: + 49 821 4086-0
info@kontron.com

www.kontron.com



3.5" Single Board Computer

3.5"-SBC Family

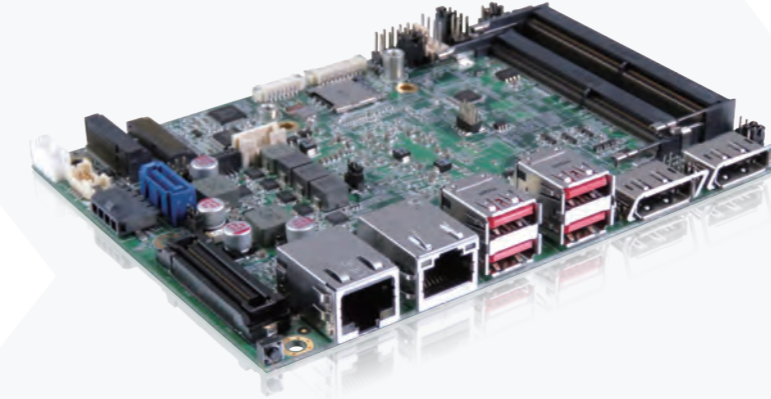

Low-power Small Form Factor

Ideal to be integrated into a variety of compact fanless systems

Unique Expansion Connector

Easy to expand additional connectors & functions

Commercial & Industrial Operating Temperature


For all environmental conditions

3.5" Single Board Computer

Kontron offers a range of 3.5" single board computers of the high quality, long-term availability and competitiveness to fulfill most different requirements for various applications from diverse vertical markets like Industrial Automation, POS/POI, KIOSK, Digital Signage, Medical, Casino Gaming, Video Surveillance or Transportation.

Kontron's 3.5" single board computers support latest processors and utilize advanced technology components. They are designed for continuous operation (24/7) under harsh operating conditions and on high system load. Most of them come up with three different operating temperature variants: commercial (0 °C ~ 60 °C), extended commercial (-20 °C~ 70 °C) and industrial (-40 °C ~ 85 °C), to cover various environmental conditions of different application scenarios.

Kontron's 3.5" single board computers ensure an extended long-term availability of up to 10 years from the release date, based on embedded key components. In addition, a corresponding portfolio of I/O expansion boards (3.5"-eIO Series) and related 3rd party accessories is also available. Furthermore, Kontron offers many value-added services like detailed documentation, a professional life-cycle management and customizing tools.

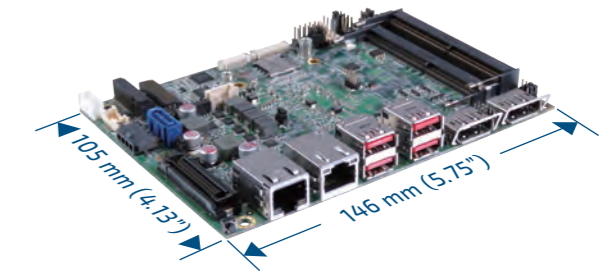

3.5"-SBC Family

3.5" Single Board Computer

- Same mechanical design gen-over-gen
- CE / FCC Class B compliant and UR certification
- Full speed USB and Ethernet



Copyright © 2024 Kontron. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Kontron and the Kontron logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized trademarks and are recognized trademarks are subject to change without notice. 3.5"-SBC-20240312 - bmy

3.5"-SBC Family

3.5" Single Board Computer



coming soon

3.5"-SBC-RPL



3.5"-SBC-TGL



3.5"-SBC-WLU



3.5"-SBC-KBL



coming soon

3.5"-SBC-ADN



3.5"-SBC-EKL



3.5"-SBC-APL V2.0



3.5"-SBC-VR1000



project base

3.5"-SBC-i1200



project base

3.5"-SBC-R39

System	Processor	Intel® Core™ i7-1365UE (10C, 12M, 1.7/4.9 GHz, 12~15~28 W) i5-1345UE (10C, 12M, 1.4/4.6 GHz, 12~15~28 W) i3-1315UE (6C, 10M, 1.2/4.5 GHz, 12~15~28 W) i7-1365GRE (4C, 12M, 1.8/4.4 GHz, 12~15~28 W) i5-1345GRE (4C, 8M, 1.5/4.1 GHz, 12~15~28 W) i3-1315GRE (6C, 10M, 1.2/4.5 GHz, 12~15~28 W) Intel® U300E (5C, 8M, 1.1/4.3 GHz, 12~15~28 W)
	Memory	2x DDR5 5200 SO-DIMM
Video	Graphics Controller	Intel® Iris® Xe Graphics
	eDP / LVDS / eDP+LVDS Combo / DSI	0 / 0 / 1 (4K@120 Hz, 24bit 2K@60Hz) / 0
	DP / HDMI	2 (8K@60Hz on rear) / 0
	CSI	0
	HDMI-In	0
Audio	Speaker-Out	1 (Stereo)
	Line-In / Line-Out / Mic-In	1 / 1 / 1
	S/PDIF-Out	0
Network Connection	Ethernet Controller	Intel® I226-LM/IT
	2.5 GbE / GbE	2 (on rear, TSN support*) / 0
	Wireless	-
Peripheral Connection	USB Type-C	0
	USB 3.2 Gen 2 / 3.2 Gen 1 / 2.0 / OTG	4 (on rear) / 0 / 3 / 0
	RS232/422/485 / RS232 / UART	0 / 2 (Tx / Rx only) / 0
	DIO / DI / DO	0 / 4 / 4
	CAN / SPI / I²C	2 / 0 / 0
Storage & Expansion	eMMC	-
	SATA	1 (v3.0)
	Micro SD Cage	0
	mSATA / mPCIe / Combo	0 / 0 / 0
	M.2 Key B	1 (PCIe x1 / USB 2.0 / SATA 3.0 / UIM)
	M.2 Key E	1 (PCIe x1 / USB 2.0 / CNV)
	M.2 Key M	1 (PCIe x4)
	Board-to-board Connector	1 (DDI/TCR/PCIe x2/PCIe x1/SM Bus/PC/UART/GSPI)
Power	Input Voltage	DC 9 V ~ 36 V
Security	Security	dTPM 2.0
Software	OS Support	Windows 11, Windows 10, Linux
Environmental	Operating Temperature	0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended) -40 °C ~ 85 °C / -40 °F ~ 185 °F (Extreme)
Compliance	EMC & Safety	CE Class B, FCC Class B, UR (UL Recognized)

* TSN support only for Core™

Intel® Core™ i7-1185G7E (4C, 12M, 1.8/4.4 GHz, 12~15~28 W) i5-1145G7E (4C, 8M, 1.5/4.1 GHz, 12~15~28 W) i3-1115G4E (2C, 6M, 2.2/3.9 GHz, 12~15~28 W) i7-1185GRE (4C, 12M, 1.8/4.4 GHz, 12~15~28 W) i5-1145GRE (4C, 8M, 1.5/4.1 GHz, 12~15~28 W) Intel® Celeron® 4305UE (2C, 2M, 2.0 GHz, 15 W)	Intel® Core™ i7-8665UE (4C, 8M, 1.7/4.4 GHz, 15 W) i5-8365UE (4C, 6M, 1.6/4.1 GHz, 15 W) i3-8145UE (2C, 4M, 2.2/3.9 GHz, 15 W) Intel® Celeron® 4305UE (2C, 2M, 2.0 GHz, 15 W)	Intel® Core™ i7-7600U (2C, 4M, 2.8/3.9 GHz, 15 W) i5-7300U (2C, 3M, 2.6/3.5 GHz, 15 W) i3-7100U (2C, 3M, 2.4 GHz, 15 W) Intel® Celeron® 3965U (2C, 2M, 2.2 GHz, 15 W)
2x DDR4 3200 SO-DIMM	2x DDR4 2400 SO-DIMM (Core™) 2x DDR4 2133 SO-DIMM (Celeron®)	2x DDR4 2133 SO-DIMM
Intel® Iris® Xe Graphics (Core™ i7 / i5) Intel® UHD Graphics (Core™ i3 / Celeron®)	Intel® UHD Graphics 620 (Core™) Intel® UHD Graphics 610 (Celeron®)	Intel® HD Graphics 620 (Core™) Intel® HD Graphics 610 (Celeron®)
0 / 1 (24bit 2ch 2K@60Hz) / 0 / 0	0 / 1 (24bit 2ch 2K@60Hz) / 0 / 0	0 / 1 (24bit 2ch 2K@60Hz) / 0 / 0
2 (8K@60 Hz* on rear) / 0	2 (4K@60Hz on rear) / 0	1 (4K@60Hz on rear) / 1 (v2.0, 4K@60Hz on rear)
0	0	0
0	0	0
1 (Stereo)	1 (Stereo)	1 (Stereo)
1 / 1 / 1	1 / 1 / 1	1 / 1 / 1
0	0	0
Intel® I226-LM/IT & Intel® I210-AT/IT	Intel® I219-LM & Intel® I210-AT	Intel® I219-LM & Intel® I210-AT
1 (on rear, TSN support**) / 1 (on rear)	0 / 2 (on rear)	0 / 2 (on rear)
-	-	-
0	0	0
4 (on rear) / 0 / 4 / 0	4 (on rear) / 0 / 4 / 0	0 / 4 (on rear) / 2 / 0
2 / 0 / 0	2 / 0 / 0	2 / 0 / 0
8 / 0 / 0	8 / 0 / 0	8 / 0 / 0
0 / 0 / 0	0 / 0 / 0	0 / 0 / 0
-	-	-
1 (v3.0)	1 (v3.0)	1 (v3.0, Celeron®) 2 (v3.0, others)
0	0	0
0 / 0 / 0	0 / 0 / 0	0 / 1 (PCIe x1 / USB 2.0 / UIM) / 0
1 (PCIe x1 / USB 2.0 / SATA 3.0 / UIM)	1 (PCIe x1 / USB 2.0 / USB 3.2 / UIM)	1 (SATA 3.0 / USB 2.0 / UIM)
1 (PCIe x1 / USB 2.0 / CNV)	1 (PCIe x1 / USB 2.0 / CNV)	0
1 (PCIe x4)	1 (PCIe x4 / SATA 3.0)	0
0	0	0
1 (2xDDI/PCIex2/PCIex1/SM Bus/PC/UART/GSPI)	1 (2xDDI/PCIex2/PCIex1/SM Bus/PC/UART/GSPI)	1 (PCIex1/SM Bus/PC/UART/GSPI)
DC 12 V	DC 12 V	DC 12 V
dTPM 2.0	dTPM 2.0	dTPM 2.0 (Core™ i7 / i5)
Windows 10, Linux	Windows 10, Linux	Windows 10, Linux
0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended) -40 °C ~ 85 °C / -40 °F ~ 185 °F (Extreme)	0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended) -40 °C ~ 85 °C / -40 °F ~ 185 °F (Extreme)	0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended)
CE Class B, FCC Class B	CE Class B, FCC Class B	CE Class B, FCC Class B

* 2x 8K for Core™ i7 / i5, 1x 8K for Core™ i3 / Celeron®

** TSN support only for Core™ GRE Series

Intel® Core™ i3-N305 (8C, 6M, 1.8/3.8 GHz, 9~15 W) Intel® N97 (4C, 6M, 2.0/3.6 GHz, 12 W)	Intel® Atom® x6211E (2C, 1.5M, 1.3/3.0 GHz, 6 W) x6212RE (2C, 1.5M, 1.2 GHz, 6 W) x6425RE (4C, 1.5M, 1.9 GHz, 12 W) Intel® Celeron® J6413 (4C, 1.5M, 1.8/3.0 GHz, 10 W)	Intel® Atom® x7-E3950 (4C, 2M, 1.6/2.0 GHz, 12 W) x5-E3940 (4C, 2M, 1.6/1.8 GHz, 9.5 W) x5-E3930 (2C, 2M, 1.3/1.8 GHz, 6.5 W) Intel® Pentium® N4200 (4C, 2M, 1.1/2.5 GHz, 6 W) Intel® Celeron® J3455 (4C, 2M, 1.5/2.3 GHz, 10 W) N3350 (2C, 2M, 1.1/2.4 GHz, 6 W)
1x DDR5 4800 SO-DIMM	2x DDR4 3200 SO-DIMM	2x DDR3L 1867 SO-DIMM
Intel® UHD Graphics Gen12	Intel® UHD Graphics Gen11	Intel® HD Graphics 505 (Atom® x7, Pentium®) Intel® HD Graphics 500 (Atom® x5, Celeron®)
0 / 1 (24bit 2ch 2K@60Hz) / 0 / 0	0 / 1 (24bit 2ch 2K@60Hz) / 0 / 0	0 / 1 (18/24bit 1/2ch 2K@60Hz) / 0 / 0
2 (4K@60Hz on rear) / 0	2 (4K@60Hz on rear) / 0	1 (4K@60Hz on rear) / 1 (v1.4, 4K@30 Hz on rear)
0	0	0
1 (Stereo)	1 (Stereo)	1 (Stereo)
1 / 1 / 1	1 / 1 / 1	1 / 1 / 1 (standard & extended temperature model) 0 / 0 / 0 (extreme temperature model)
1	0	0
Intel® I226-LM	Intel® I226-LM/IT	Intel® I210-AT
2 (on rear) / 0	2 (on rear, TSN support*) / 0	0 / 2 (on rear)
-	-	-
1 (on rear, v3.2 G2 w/ DP & PD 5 V / 3 A)	0	0
2 (on rear) / 0 / 3 (1x on rear) / 0	2 (on rear) / 0 / 6 (2x on rear) / 0	0 / 4 (on rear) / 2 (default) / 0 2 (on rear, R1000) / 3 (3.5"-SBC-APL-6-E3950) / 0
2 / 2 (Tx / Rx only) / 0	2 / 0 / 0	2 / 4 / 0
0 / 4 / 4	8 / 0 / 0	8 / 0 / 0
0 / 0 / 0	2 (w/ Intel® PSE) / 1 (GP-SPI, w/ Intel® PSE) / 1	0 / 0 / 0
-	-	-
1 (v3.0)	1 (v3.0)	1 (v3.0)
0	0	1 (on front)
0 / 0 / 0	0 / 0 / 0	0 / 1 (PCIe x1 / USB 2.0 / UIM) / 0
1 (PCIe x1 / USB 2.0 / UIM)	1 (PCIe x1 / USB 2.0 / UIM)	1 (USB 2.0 / SATA 3.0 / PCIe x1 / UIM, default) 1 (SATA 3.0 / PCIe x1 / UIM, 3.5"-SBC-APL-6-E3950)
1 (PCIe x1 / USB 2.0 / CNV)	1 (PCIe x1 / USB 2.0 / SIO / UART / I²C)	0
1 (SATA 3.0 default) / PCIe x1 (optional)	1 (SATA 3.0)	0
1 (PCIex1/SM Bus/PC/UART/GSPI)	1 (2x PCIe2/SM Bus/PC/UART/GSPI)	0
DC 9 V ~ 36 V	DC 12 V	DC 12 V
dTPM 2.0	dTPM 2.0	dTPM 2.0 (optional)
Windows 10, Linux	Windows 10, Linux	Windows 10, Linux
0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended)	0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -40 °C ~ 85 °C / -40 °F ~ 185 °F (Extreme)	0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended) -40 °C ~ 85 °C / -40 °F ~ 185 °F (Extreme)
CE Class B, FCC Class B, UR (UL Recognized)	CE Class B, FCC Class B, UR (UL Recognized)	CE Class B, FCC Class B

* TSN support only for Atom® RE Series

AMD Ryzen™ V1605B (4C, 4M, 2.0/3.6 GHz, 12~15~25 W) V1202B (2C, 4M, 2.3/3.2 GHz, 12~15~25 W) R1606G (2C, 4M, 2.6/3.5 GHz, 12~15~25 W) R1505G (2C, 4M, 2.4/3.3 GHz, 12~15~25 W) R1305G (2C, 4M, 1.5/2.8 GHz, 8~10 W)	MediaTek® Genio 1200 (4C Cortex-A78 2.2GHz + 4C A55 2.0GHz, 31 W)	Rockchip RK3399 (2C Cortex®-A72 + 4C A53 up to 1.8 GHz) RK3399K (2C Cortex®-A72 + 4C A53 up to 2.0 GHz)
2x DDR4 2400 SO-DIMM	4 GByte / 8 GByte LPDDR4X	2 GByte / 4 GByte LPDDR4
AMD Radeon™ Vega 8 (V1605B) AMD Radeon™ Vega 3 (V1202B & R1000)	ARM® Mali-G57 MP5	Mali-T864
0 / 1 (18/24bit 2ch 2K@60Hz) / 0 / 0	0 / 1 (24bit 2ch 2K@60Hz) / 0 / 1 (4K@60Hz)	1 (4K@60Hz) / 1 (24bit 2ch 2K@60Hz) / 0 / 0
1 (4K@60Hz on rear) / 1 (v2.0, 4K@60Hz on rear)	1 (4K@60Hz on front) / 0	1 (4K@60Hz on front) / 1 (v2.0, 4K@60Hz on front)
0	3 (48MP / 16MP+16MP @30fps)	-
0	1 (4K@60Hz on front)	-
1 (Stereo)	0	1 (Stereo)
1 / 1 / 1	0 / 1 / 1 (CTIA type on front)	1 / 1 / 1
0	0	0
Intel® I210-AT & Intel® I211-AT	Intel® I226IT & Realtek RTL8211FD	Realtek RTL8211F + Realtek RTL8153B
0 / 2 (on rear)	1 (on front) / 1 (on front)	0 / 2 (on front)
-	-	Wi-Fi + Bluetooth (AMP&K AP6236)
0	0	0
4 (on rear, V1000) / 0 / 4 (V1000) / 0 2 (on rear, R1000) / 0 / 6 (2x on rear, R1000) / 0	0 / 1 (on front) / 4 (2x on front) / 0	0 / 2 (on front) / 3 (1x on front) / 1 (on front)
2 / 2 / 0	2 / 2 / 1 (debug support)	0 / 2 (Tx / Rx only) / 0
8 / 0 / 0	8 / 0 / 0	8 / 0 / 0
0 / 0 / 0	0 / 0 / 1 (for touch control)	0 / 0 / 0
-	32 GByte	16 GByte or 32 GByte
0	0	0
0	1 (on rear)	1
0 / 1 (PCIe x1 / USB 2.0 / UIM) / 0	0 / 0 / 0	0 / 1 (PCIe x1 / USB 2.0) / 0
0	1 (USB 2.0 / USB 3.2 / UIM)	1 (USB 3.2 / UIM)
0	1 (PCIe x1 / USB 2.0)	1 (PCIe x1 / USB 2.0)
1 (PCIe x4)	1 (PCIe x2)	0
0	1 (eDP/HDMI/PCIex2/PC/UART/SPIM)	0
DC 12 V	DC 12 V	DC 13 V ~ 30 V (Configuration 1) DC 12 V (Configuration 2)
dTPM 2.0	dTPM 2.0 (optional)	SHA-based CryptoAuthentication
Windows 10, Linux	Linux, Android	Linux, Android
0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended) -40 °C ~ 85 °C / -40 °F ~ 185 °F (Extreme)	0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard) -40 °C ~ 85 °C / -40 °F ~ 185 °F (Extreme)	0 °C ~ 60 °C / 32 °F ~ 140 °F (standard)
CE Class B, FCC Class B	CE Class B, FCC Class B	CE Class A, FCC Class A